

銘昇牌 同軸式泵浦

用途：

1. 一般公寓大樓給水消防。
2. 冷氣冷凍循環水。
3. 一般工業給水農業灌溉給水。
4. 建築、土木、工程、施工用水。
5. 污水處理設備。

特點：

1. 同軸直接式構造，體型小，不佔空間，安裝簡便。
2. 葉輪皆經過平衡校正機校正，運轉平穩、安靜。
3. 抽水機內部構造採用渦流式水流設計，水量大、揚程高。
4. 採用名牌機械軸封 (mechanical seal) 保證不漏水、不損軸心，免入棉紗麻煩，延長抽水機壽命。

USE:

1. Water supply & fire fighting for apartment.
2. For circulation water of air-conditioner & refrigerator.
3. Water supply for agricultural irrigation & industry.
4. Water for construction & civil engineering.
5. Sewage disposal equipment.

CHARACTERISTICS:


1. Small & without observe space cause by the coaxial volute construction.
2. Impeller was corrected proof by balance correction, so revolve sure and steady and quiet.
3. Great water volume and high swelling from pump by the whirl water current designed.
4. Leaking proof, axis lossless, not necessary to insert cotton yarn and lengthen pump's life by famous brand mechanical seal used.

銘昇電機股份有限公司
TEL：04-8724933 FAX：04-8724935
<http://www.ms-pumtech.com.tw>
e-mail:pumtech@ms38.hinet.net
51143 彰化縣社頭鄉中山路1段229巷1號



GT型

同軸式泵浦結構圖

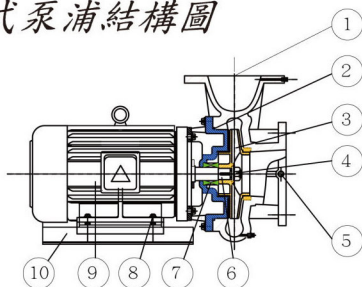

10	機座	2	FC20
9	馬達	1	TEFC
8	螺栓	4	FC20
7	機械軸封	1	Option
6	心軸	1	SUS-410
5	塞頭	1	FC20
4	葉輪螺帽	1	
3	葉輪	1	FC20/BC6
2	O型環	1	
1	泵殼	1	FC20
No.	ITEM	QTY	Material

G-2P 60HZ 標準性能規格表

No.	型 式 Type	馬力 HP	口 徑 (In)	揚水量 L/Min										
				10M	15M	20M	25M	30M	35M	40M	50M	60M		
1.	G-6205-25	1/2	1"	80	60	40								
2.	G-621-40	1	1½"	155	135	100								
3.	G-622-40	2	1½"		225	210	150							
4.	G-622-50	2	2"	265	248	225								
5.	G-623-50	3	2"		300	260	240	180						
6.	G-623-65	3	2½"	450	400	260								
7.	G-625-65*50	5	2½"*2"	580	565	548	510	474	380	180				
8.	G-625-80	5	3"	730	650	580	460	250						
8.	G-627-65*50	7½	2½"*2"			600	585	540	420	400				
9.	G-627-80	7½	3"		900	870	780	670						
10.	G-627-100	7½	4"	1200	950	800	650							
11.	GT-6210-65*50	10	2½"*2"					610	550	480	305			
12.	G-6210-80	10	3"				810	750	486	570				
13.	G-6210-100	10	4"		1150	1000	900	600						
14.	G-6215-80	15	3"					875	855	800	600			
15.	GT-6215-100	15	4"		1500	1250	1080							
16.	GT-6220-100	20	4"					1003	1200	1100	900			
17.	GT-6225-100	25	4"								1400	1080	800	
18.	GT-6230-100	30	4"								1100	1380	1200	

以上規格如有變更不另行通知


接液材質：FC/BC、FC/SCS-13、SCS13(SUS304)、SCS-14(SUS316)，依客戶實際需要訂製
訂貨時請指示

馬達：馬力、相數、電壓、週率

G- 4P 60HZ 標準性能規格

No.	型式 Type	馬力 HP	口徑 (In)	揚水量 L/Min									
				10M	15M	20M	25M	30M	35M	40M	45M	50	
1	G-643-65	3	2½"	480	450								
2	G-645-80	5	3"	620	480	460							
3	G-647-80	7½	3"	1320	1060	590							
4	GT-647-100	7½	4"	1300	1200	850							
5	G-6410-80	10	3"	1400	1120	700							
6	G-6410-100	10	4"	1560	1400	1200							
7	G-6410-125	10	5"	2090	1750								
8	G-6415-100	15	4"	1760	1550	1230	820						
9	G-6415-125	15	5"	2640	2120	1750							
10	GT-6415-150	15	6"	2800	2500	2000							
11	G-6420-100	20	4"		1760	1500	1250						
12	G-6420-125	20	5"		2680	2215	2110	1950					
13	GT-6420-150	20	6"	3415	3200	2720	1020						
14	GT-6425-125	25	5"		2700	2300	1700	1460					
15	GT-6425-150	25	6"		3400	2930	2360	1550					
16	GT-6430-125	30	5"					2000	1800	1600	1400		
17	GT-6430-150	30	6"		3475	3220	2670	1810					
18	G-6430-200	30	8"	4650	4400	3795	2260						
19	GT-6440-150	40	6"			3465	3200	2935	2410				
20	GT-6440-200	40	8"		5215	4660	4500	3880					
21	GT-6450-150	50	6"							3000	2500	2200	
22	GT-6450-200	50	8"			5450	4700	4310	3870				
23	G-6460-200	60	8"				5180	4750	4450	3740			
24	G-6475-200	75	8"					5410	4880	4550	3816		
25	G-6475-250	75	10"		7825	7150	6460	5750	4980				

型號說明 TYPE DESCRIPTION

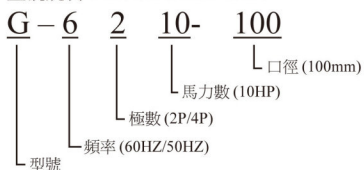

安裝配管示意圖

出口防震軟管以上管路及配件請做適當支撐或鬆掉

